


Fomax F5107 Panel PC



◆ Specifications

Model Fomax F5107		Watchdog	0~255 Sec
Basic Configuration		Displays	
CPU	Intel® Core™ i3 3.2GHz, 3M Cache, 64 Bit, Dual-Core (Standard)	Type	15" XGA TFT LCD
	6th & 7th Intel® Core™ i3/i5/i7/Pentium®/Celeron® CPU series, LGA1151 Socket (Option)	Resolution	1024×768
Chipset	Intel® Q170	Brightness	250cd/m ²
Memory	1×4GB DDR4 SODIMM (2×SODIMM), Max. 32GB	Contrast Ratio	700:1
	1×500GB, With 24×7 operation (Standard)	Viewing Angle	160° (H), 140° (V)
Storage	HDD (2.5"), SSD (Option)	Backlight	LED
Expansion Slots	1×PCI-Ex4, 1×Mini-PCle (full-size)	Touchscreen	5-wire resistive type (Standard)
	Standard: 2×RS-232/422/485 (rear); 4×RS-232 (Internal, optional external)	Power	
I/O Interface	Standard: 4×USB 3.0 (rear); 2×USB 2.0 (Internal, optional external)	Power Input	100~240VAC
	4×SATA 3.0 (support RAID 0/1/5/10)	Mechanical Specifications	
Video Memory	1×SIM Card Holder	Cooling	Active with fan
	2×10/100/1000M	Construction	Aluminum Front Panel & Stainless Steel Panel, VESA
Drivers	On board, DVMT	Mounting	Panel, VESA
Option	External USB DVD-ROM or DVD-RW	Dimensions (W×H×D)	410mm×315mm×83mm
		Cutout Size (W×H)	378mm×291mm
Monitoring		Weight	7.3kg
		Environmental	
		Operating Temperature	0~50℃
		Storage Temperature	-0~70℃
		Relative Humidity	10~85% (non-condensing)
		IP Rating	IP65 compliant front panel
		Certification	FCC, CE

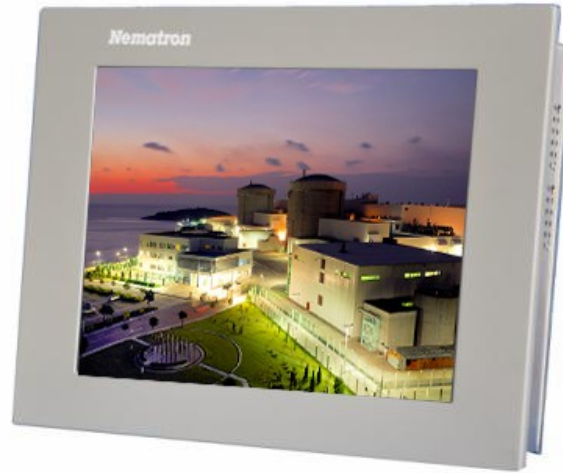

Shanghai Nematron Technology Co., Ltd.

245 Xinjun Ring Road, Suite D302 Caohejing Pujiang Hi-Tech Park, Shanghai 201114, China

Email: marketing@nematron.com.cn